

Electro-Pneumatic Positioner YT-1050

Product Number: YT-1050 (specify your requirement)

Model	Motion Type	Acting Type	Explosion Proof	Lever Type		Orifice Type	Connection Type	Ambient Temp
				Linear	Rotary			
YT-1050	L Linear	S Single	n Non-Explosion	1 10 ~ 40mm	1 M6 × 34L	1 φ 1	2 NPT	S -20°C ~ 60°C
	R Rotary	D Double	m Ex dmb IIB T5	2 30 ~ 70mm	2 M6 × 63L	2 φ 2		H -20°C ~ 120°C
				3 60 ~ 100mm	3 M8 × 34L	3 None		L -40°C ~ 70°C
				4 100 ~ 150mm	4 M8 × 63L			
					5 NAMUR			




YT-1050R



YT-1050L

Item · Type	Single	Double
Input Signal	4-20mA DC	
Impedance	250 ± 15 Ω	
Supply Pressure	1.4 ~ 7kgf/cm ² (20 ~ 100 psi)	
Stroke	10~150mm	0 ~ 90°
Air Connection	NPT 1/4	
Gauge Connection	NPT 1/8	
Conduit	PF 1/2 (G 1/2)	
Explosion Proof	Ex dmb IIB T5	
Enclosure	IP66	
Ambient Temp.	Operating	-20°C~70°C(-4~158°F)
	Explosion	-20°C~60°C(-4~140°F)
Linearity	± 1% F.S. ± 2% F.S.	
Hysteresis	± 1% F.S.	
Sensitivity	± 0.2% F.S. ± 0.5% F.S.	
Repeatability	± 0.5% F.S.	
Air Consumption	3LPM (Sup=1.4kgf/cm ² , 20psi)	
Flow Capacity	80LPM (Sup=1.4kgf/cm ² , 20psi)	
Material	Stainless steel 316	
Weight	5.71 kg / 12.6 lb	

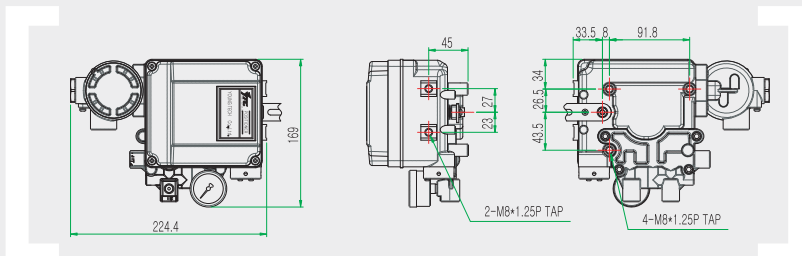

YT-1050, the Electro-Pneumatic Positioner is used for operation of pneumatic valve actuators by means of electrical controller or control system with an analog output signal of DC 4 to 20mA or split ranges.

- Simple zero and span adjustment
- No resonance between 5-200Hz
- Auto/Manual switch
- RA v.s. DA action and 1/2 split range setting by simple adjustment